



Scientific Grade CCD Spectroradiometer & Integrating Sphere Test System LPCE-2(LMS-9500)

Brochure

Global Office of Lisun Electronics Inc.

<http://www.Lisungroup.com>

Lisun Group (Hong Kong) Limited

Add: Room 803, Chevalier House, 45-51 Chatham Road South, Tsim Sha Tsui, KL, HK

Tel: 00852-68852050 Fax: 00852-30785638

Email: SalesHK@Lisungroup.com

Lisun Electronics (Shanghai) Co., Ltd

Add: 113-114, No. 1 Building, Nanxiang Zhidi Industry Park, No. 1101, Huyi Road, Jiading District, Shanghai, 201802, China

Tel: +86(21)5108 3341 Fax: +86(21)5108 3342

Email: SalesSH@Lisungroup.com

Lisun Electronics Inc. (USA)

Add: 445 S. Figueroa Street, Los Angeles, CA 90071, U.S.A.

Email: Sales@Lisungroup.com

Lisun China Factory

Add: NO. 37, Xiangyuan Road, Hangzhou City, Zhejiang Province, China

Tel: +86-189-1799-6096

Email: Engineering@Lisungroup.com

Leader in Lighting & Electrical Test Instruments

Rev. 9/1/2025



CONTENT TABLE


Name	Model	Remark	Page
Scientific Grade CCD Spectroradiometer	LMS-9500C	Option is LMS-9500CVIS-NIR	-----2
Optical Fiber	CFO-1.5M	Option is CFR-1.5M	-----3
Digital CC and CV DC Power Supply	DC3005	Option is DC3010 or DC6005	-----3
Digital Power Meter	LS2050C		-----4
AC Power Source	LSP-500VARC	Option is LSP-500VARC-Pst	-----5
New Design Integrating Sphere	IS-1.5MA	Option is IS-1.5MA55C	-----6
Small Integrating Sphere	IS-0.3M	For single LEDs test	-----6
Standard Lamp Source	SLS-50W	30V/50W to calibrate big integrating sphere	-----7
Auxiliary Lamp Test Set	RLS-50W	To correct lumen due to the self absorption issue	-----7
Standard Lamp Source	SLS-10W	10V/10W to calibrate for small integrating sphere	-----7
Multi-function LED Clamps Set	CLAMP-2	for through hole LED, COB LED and SMD LED	-----8
19 Inch Cabinet	CASE-19IN		-----8
Appendix 1: LM-79 Light Source and TM-30 Test Report			----9/11
Appendix 2: Plant Growth Lamp Test Report			-----10
Appendix 3: LM-79 and LM-80 Warm-up Test Report			--12/13

Note: 1. If you need to test the single LED or LED Chip, you should choose the items which marked by **Blue.**

2. Already include the upgradeable & free software which can run in Win7, 8, 10 and 11 (USB driver was register by Microsoft, it can install directly).

1、 Scientific Grade CCD Spectroradiometer

LMS-9500 Scientific Grade High Accuracy CCD Array Color Spectroradiometer fully meets Energy Star IESNA LM-79 and GB/T24824 standards etc. It can test CFL, HID, Promise Light, Tungsten Halogen Lamps, which can reach the scientific grade measurement accuracy. LMS-9500 is composed of Concave Average Diffraction Grating and Scientific Grade CCD, and it uses unique stray light control technology, wide dynamic linear technology, precision CCD electronic drive technology and complex matrix software technology. The instrument is traceable to the Chinese National Institute of Metrology(NIM) and the USA NIST standards.

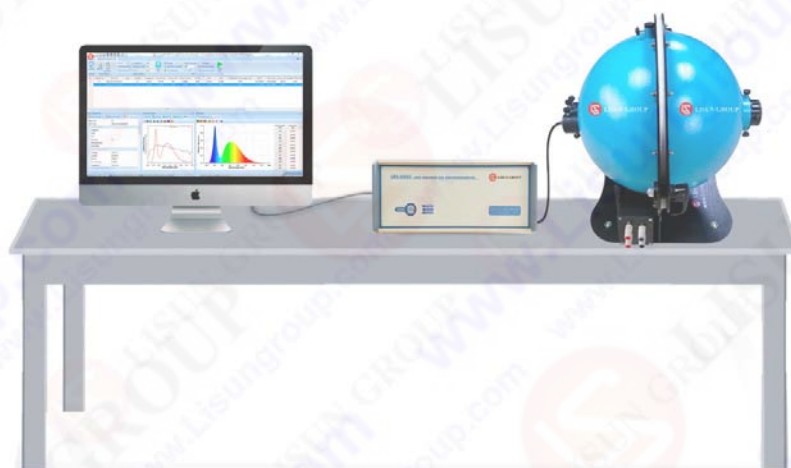

Standard:

Fully meet GB/T-5702, GB/T-7922, GB/T-20145, GB/T-24824
CIE 177, CIE84, CIE-13.3, IES LM-79-19 and IES LM-79-08

Specification:

- CCD detector: Hamamatsu TE-cooled (Temp: $-10^{\circ}\text{C} \pm 0.05^{\circ}\text{C}$) high sensitivity back-thinned detector
- Spectral wavelength accuracy: $\pm 0.2\text{nm}$, Resolution: $\pm 0.1\text{nm}$, Sample scanning steps: $\pm 0.1\text{nm}$
- Accuracy of chromaticity coordinate (Δx , Δy): ± 0.0015 (Standard A Lamp)
- Correlated color temperature CCT: 1, 500K~100, 000K, CCT accuracy: $\pm 0.2\%$
- Color rendering index range: 0~100.0, Accuracy: $\pm(0.3\%rd \pm 0.3)$
- Photometric linear: $\pm 0.2\%$, Stray light $< 0.015\%$ (600nm) and $< 0.03\%$ (435nm)
- Integration time: 0.1ms-60s
- Flux testing method: spectrum, photometric and spectrum with photometric revision

LI SUN Model	LMS-9500C	LMS-9500CUV-VIS	LMS-9500CVIS-NIR
Wavelength	350-800nm	200-800nm	350-1050nm

P.S. If the UV Accuracy Test, please go here learn more: [LPCE-2\(LMS-9000CUV\)](#)

2、 Optical Fiber



The optical fiber is used to connect the integrating sphere with spectroradiometer.

LISUN Model	CFO-1.5M	CFS-1.5M
Products Name	1.5m Optical Fiber	1.5m Silica Optical Fiber
Work in Wavelength	350-1050nm	200-1050nm

P.S. The 2m or 3m length optical fiber can be design according to customers' request.

3、 Digital CC and CV DC Power Supply

The DC Series Power Supplies are with high stability and high accuracy. The voltage and current can be adjustable and simple operation. They are suitable to supply DC Power for the standard lamps.



Specifications:

- Accuracy of Voltage and Current: $\pm(0.02 \text{ Reading} + 0.01\% \text{ Range} + 1 \text{ Digit})$
- Stability of Output Voltage/Current: $\pm 0.01\% \text{ Reading}/3\text{min}$
- Digital control for Constant Current output or Constant Voltage output
- Communicate with PC via software, the Voltage & Current set by the software and Power Output can be remote controlled.

Model	DC3005	DC3010	DC6005	DC6010	DC12005
U Range	0.0005-30.000V	0.0005-30.000V	0.0005-60.000V	0.0005-60.000V	0.0001-120.00V
I Range	0.0005-5.0000A	0.0005-10.000A	0.0005-5.0000A	0.0005-10.000A	0.0005-5.0000A

4、 Digital Power Meter



LISUN Model	Measure	Remark
LS2012	U(AC&DC), I(AC&DC), P(AC&DC), Power Factor PF(AC)	Digital Tube display
LS2050B	U(AC&DC), I(AC&DC), P(AC&DC), Power Factor PF(AC), Displacement Factor DF(AC) and Total 0-50 Harmonic in IEC/CSA	Test Accuracy is Class 0.5 with LCD touch screen display, it has special Software can be run in Win7, Win8 or Win10
LS2050C	U(AC&DC), I(AC&DC), P(AC&DC), Power Factor PF(AC), Displacement Factor DF(AC) and Total 0-50 Harmonic in IEC/CSA	Test Accuracy is Class 0.2 with LCD touch screen display, it has special Software can be run in Win7, Win8 or Win10

P.S. The LS2050C is fully meet LM-79-19 requirements and the frequency Range: 0.5Hz-100kHz

5、 AC Power Source



- AC-DC-AC frequency conversion technology, Controlled & tested by 16 bits MCU
- Protection for over hot, thundering voltage and current
- Total voltage distortion: $\leq 0.6\%$; Voltage stability: $\leq 0.1\%/30\text{min}$
- Load adjust rate: $\leq 0.1\%$; Frequency stability: $\leq 0.05\%/30\text{min}$
- Output voltage range: AC 0.0~300.0V, Output Frequency Range: 45~70Hz, 100Hz, 200Hz and 400Hz
- Input Power: 220V and 50/60Hz

- Communicate with PC via software, the Voltage & Current set by the software and Power Output can be remote controlled.

P.S. LSP-500VARC and LSP-1KVARC are the update version with big LCD screen.

LISUN Model	Output Power	Specification
LSP-500VARC (with Trigger Function)	500VA	0~150V is 4.2A and 150~300V is 2.1A
LSP-500VARC-Pst (IEC-Pst AC Source Generator)		
LSP-1KVARC (with Trigger Function)	1KVA	0~150V is 8.4A and 150~300V is 4.2A
LSP-1KVARC-Pst (IEC-Pst AC Source Generator)		

The LSP-500VARC-Pst and LSP-1KVARC-Pst are according to IEC TR 61547-1:2020 IEC61000-3-3, IEC 61000-4-15 and IEEE 1453 Pst programmable function as below:

Table 1 – Voltage fluctuations – Test specification of voltage fluctuations applied at input AC mains 120/230 V and 50/60 Hz

Rectangular amplitude modulations with duty cycle of 50 % ^{a c d f}					
Voltage changes per minute cpm	Modulation frequency f_m Hz	Relative voltage fluctuation $d = \Delta U/U$ %			
		120 V 50 Hz	120 V 60 Hz	230 V 50 Hz	230 V 60 Hz
39	0,325 0	1,045	1,040	0,894	0,895
110	0,916 7	0,844	0,844	0,722	0,723
1 056	8,8	0,353 b	0,353 b	0,275 b	0,275 b
1 620	13,5	0,545	0,548	0,407	0,409
4 000	33 1/3 ^e	3,426	Test not required	2,343	Test not required
4 800	40,0 ^e	Test not required	4,837	Test not required	3,263

^a See Table 5 of IEC 61000-4-15:2010 and Table D1 of IEC 61000-3-3:2013.

^b See Tables 2a and 2b of IEC 61000-4-15:2010 for $R_{inst} = 1$; the values of $d = 0,252\%$ and $d = 0,196\%$ are increased to respectively $0,353\%$ and $0,275\%$ to give $I_{st}^{LM}(1) = 1$.

^c The duration of the voltage fluctuation and recording of the illuminance is recommended to be a minimum of 180 s (60 s for the transient response of the flickermeter's filters and 120 s for the duration of the statistical evaluation of the flicker level in block d, see A.2.5). First of all, the transient response of the light flickermeter's filters should be considered, which is dominated by the illuminance adapter (block a, see A.2.2). The time constant of this filter is set at 10 s, reaching the 90 % of the value corresponding to the steady state response at approximately 50 s. In addition, the evaluation period should contain an integer number of voltage fluctuation periods. For the set of test modulation frequencies given in this table, the minimum duration to achieve an integer number of voltage fluctuation periods in all the test cases is 120 s.

^d Recommended absolute tolerance for the duty cycle is ± 2 pp, for the modulation frequency the recommended tolerance is $\pm 1\%$ and for the relative voltage fluctuation the recommended tolerance is $\pm 5\%$.

^e The 33 1/3 Hz and 40 Hz modulation frequencies should be synchronous with the supply frequency of respectively 50 Hz and 60 Hz with a fixed phase angle as defined by Equation (1).

^f The light flicker specifications in this document are expanded such that it is aligned with the voltage flicker specifications given in IEC 61000-4-15, which is limited to 120 V and 230 V, 50 Hz and 60 Hz. No voltage fluctuation tests are available yet for 100 V, 200 V and 277 V. However, in practice the test specifications given in this table for 120 V and 230 V can be applied for 100 V and 200/277 V respectively for indicative purposes.

LSP-500VARC-Pst or LSP-1KVARC-Pst can work with LISUN LSRF-3 to do Flicker dynamic Pst LM(I) test in IEC TR 61547-1:2020

6、 New Design Integrating Sphere

Due to the LED luminaires such as LED street luminaires developed, to do 4π geometry testing, it is hard to be hold in the traditional integrating sphere design. To solve this problem, LISUN design a new kind of sphere.



A Molding Integrating Sphere VS the traditional Integrating Sphere

LISUN new Integrating sphere has the following advantages:

- The hold base can bear max 20kg, it can test all kinds of luminaires and light source such as E27/E40, all tubes such as T5/T8/T12 and all kinds of luminaires
- The hold base can be installed in the ceiling or down, height can be adjustable
- The test hold base has four power cables connect to the outside Power Supply and max is 5KW
- Build-in Cross laser system which help to install the standard lamp and testing lamp in the centre of the integrating sphere



Build-in Cross Laser System

Specification:

- Diameter: 0.3m, 0.5m, 1.0m, 1.5m, 1.75m, 2.0m, 2.5m and 3.0m
- The painting of integrating spheres is according to CIE Pub.No.84(1989)
- BaSO₄ coating: $\rho(\lambda) \geq 0.96(450\text{nm} \sim 800\text{nm})$ and $\rho(\lambda) \geq 0.92(380\text{nm} \sim 450\text{nm})$
- Fine diffuse reflection: Reflectance $\rho \approx 0.8$ and accuracy of $\rho(\lambda) < 1.5\%$

Order Number:

Sphere Diameter	1.0m	1.5m	1.75m	2m
LISUN Model	IS-1.0MA	IS-1.5MA	IS-1.75MA	IS-2.0MA
Cycle side opening	IS-1.0MA33C	IS-1.5MA55C	IS-1.75MA66C	IS-2.0MA77C

Remark:


The code 55C in IS-1.5MA55C means the side opening is diameter=50cm cycle size

7、 Auxiliary Lamp (RLS-50W)

Due to the luminaires material has self-absorption, the test flux will be a bit difference than the original flux when test the luminaires in the integrating sphere and LISUN 350-1050nm Spectroradiometer Test System, according to CIE request, it is necessary use an Auxiliary lamp to do flux self-absorption revise.

Integrating Sphere Size	Auxiliary Lamp (350-1050nm)
1m/1.5m/1.75m	RLS-50W
2m/2.5m/3m	RLS-100W

8、 Standard Light Source

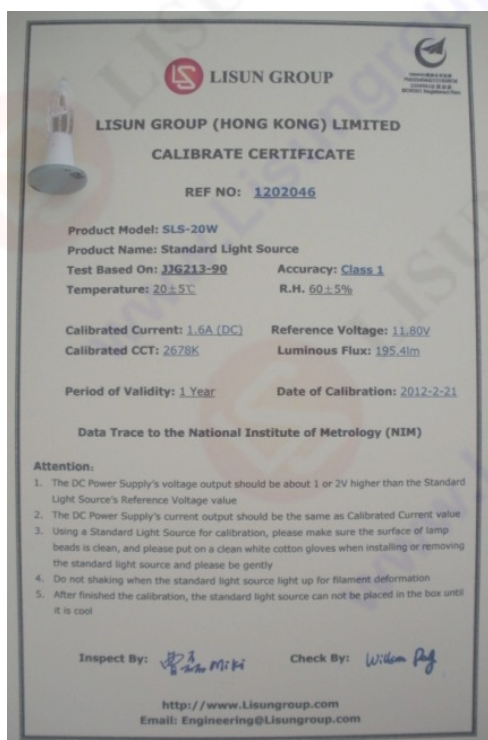

The **Standard Light Source** is used to calibrate LISUN LPCE-2 Scientific Grade Spectroradiometer Integrating Sphere System or LPCE-3 CCD Spectroradiometer Integrating Sphere Compact System. The Standard Light Source Calibrate Certificate can be traced to NIM and NIST. The different size of Integrating Sphere should choose the right power of standard lamp source.

Integrating Sphere Size	Standard Light Source (350-800nm)	Standard Light Source (350-1050nm)
0.3m/0.5m	SLS-10W	SLS-10WIR
1m/1.5m/1.75m	SLS-50W	SLS-50WIR
2m/2.5m/3m	SLS-100W	SLS-100WIR

9、 Multi-function LED Clamps Set

The whole sets includes three good thermal conductivity clamps and an extended converter : for through hole LED, for COB LED for multi-functions SMD LED, they can work with 0.3m or 0.5m integrating sphere



10、 19Inch Cabinet (CASE-19IN)

Combine all of the test instruments in a 19 inch standard Cabinet, makes the whole systems looks nice and is simple to use




The next pages are LPCE-2 (LMS-9500) Test Report.

Lightsource Test Report

Report No: 1763

Test Time: 2025-08-29 12:34:25

Category: LED
Spec: 20W
Manufacturer: PHILIPS

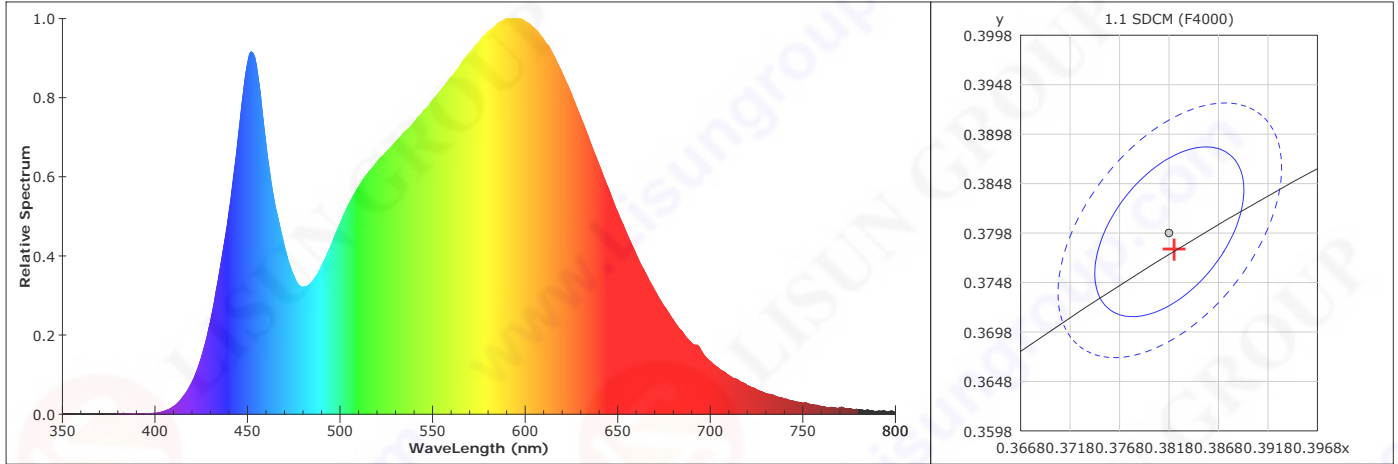Type: Downlight
Number: 1763
Submitter: Jacky

CIE Colorimetric Parameters

CIE(x,y): 0.3823,0.3781 CIE(u,v): 0.2258,0.3350 CIE(u',v'): 0.2258,0.5025
 CCT: 3959 K (Duv=0.000090) Dominant Wavelength: 579.2 nm Color Purity: 0.282
 Peak Wavelength: 595.0 nm Half Width: 149.3 nm Color Ratio: R:0.184, G:0.779, B:0.037

Color Render Index: Ra:83.1 , avgR(1~14):76.8 , avgR(1~15):76.7

R1: 81	R2: 90	R3: 95	R4: 82	R5: 82	R6: 86	R7: 86	R8: 64
R9: 8	R10: 75	R11: 80	R12: 66	R13: 83	R14: 98	R15: 75	

Color Quality Scale: Qa:82.8 , Qf:83.1 , Qp:82.5 , Qg:92.4 ,

Q1: 82	Q2: 98	Q3: 81	Q4: 77	Q5: 82	Q6: 83	Q7: 85	Q8: 89
Q9: 98	Q10: 89	Q11: 85	Q12: 84	Q13: 83	Q14: 72	Q15: 76	

TM-30: Rf:84 , Rg:95

TLCI-2012: 69

Gamut Area Index (GAI): GAI_EES:72.1 , GAI_BB_8:92.2 , GAI_BB_15:98.1

Photometric Parameters

Luminous Flux: 1776.07 lm	Radiant Power: 5.430 W	Efficacy: 89.61 lm/W
Energy Efficiency Class:F (EU 2019/2015 η_{TM}):89.61lm/W)		S/P: 1.682
M/P Ratio (WELL): 0.682	Kmel,v: 0.820 mW/lm	$\gamma_{mel,v}(D65)$: 0.618
Melanopic Flux (Φ_{mel}): 1455.96 mW		

Pupil Flux: 2664.72 Plm (Kp=1.500)

Pupil Lumens per Watt: 134.45 Plm/W

Circopic Flux: 5738.72 lm

Mesopic Flux (CIE R.): 2161.78 lm (Lp=0.100)

Mesopic Flux (USP): 2467.55 lm (Lp=0.100)

Mesopic Flux (MOVE): 2227.40 lm (Lp=0.100)

Blue Light Characteristics

Φ_{blue} : 1.178 W	Φ_{nblue} : 0.540 W	Φ_w : 5.425 W	Φ_v : 1776.068 lm
RblueV: 663.099 uW/lm	Rblue: 21.709 %	Rnblue: 45.893 %	
BRv: 4.81E-04	Low Blue Light Level: 1	BR: 0.706	Blue Light Radiation Level: 1
$\Phi_B@400\sim500nm$: 0.853 W	$\Phi_B@380\sim500nm$: 0.854 W		$\Phi_b@380\sim500nm$: 1.208 W

Electric Parameters

Voltage: 219.800 V	Current: 0.1020 A	Power: 19.820 W
Power Factor: 0.8840	Frequency: 49.96 Hz	

 Geometry: 4n, m
 Warmup Time: 24 Minutes
 Spectroradiometer: LMS-9500C

 Self-absorption Factor: 1.000
 Integration Time: 170 ms
 Digital Power Meter: LS2008R/LS2012-NEW

 Photometric Method: sphere-photometer (spec_rev)
 Peak of Signal: 51860
 Power Source: LSP Series

 Test Lab: LISUN GROUP
 Operator: Jacky

 Testing Environment: Ts:27°C, Ta:25°C,65%
 Approver:

Plant Growth Lamp Test Report

Report No: 1763

Test Time: 2025-08-29 12:34:25


Category: LED

Type: Downlight

Spec: 20W

Number: 1763

Manufacturer: PHILIPS

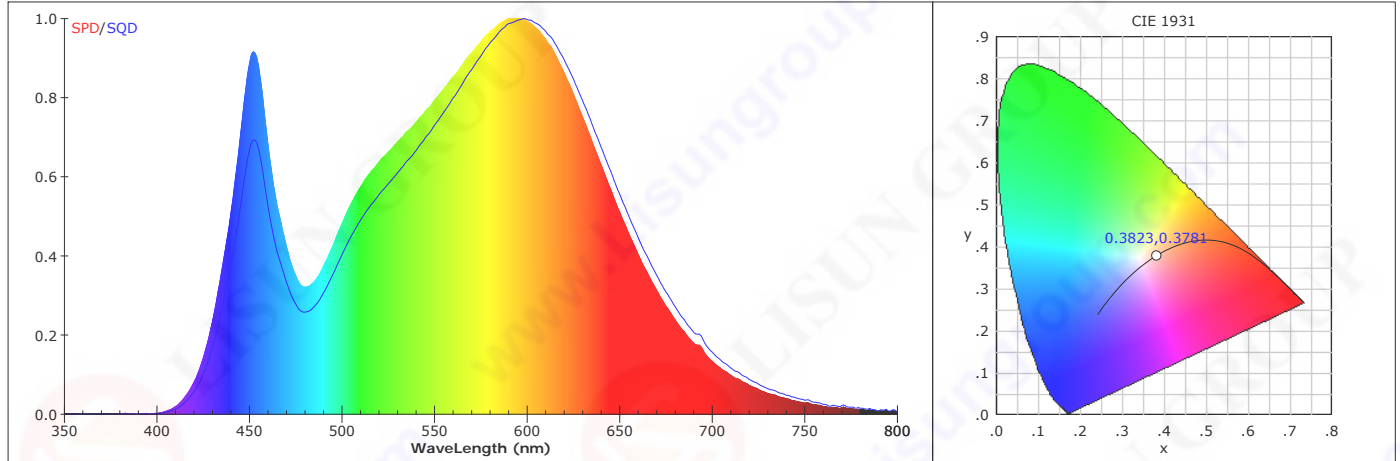Submitter: Jacky

CIE Colorimetric Parameters

CIE(x,y): 0.3823,0.3781

CIE(u,v): 0.2258,0.3350

CIE(u',v'): 0.2258,0.5025

CCT: 3959 K (Duv=0.000090)

Dominant Wavelength: 579.2 nm

Color Purity: 0.282

Peak Wavelength: 595.0 nm

Half Width: 149.3 nm

Color Ratio: R:0.184, G:0.779, B:0.037

Color Render Index: Ra:83.1, avgR(1~14):76.8, avgR(1~15):76.7

R1: 81

R2: 90

R3: 95

R4: 82

R5: 82

R6: 86

R7: 86

R8: 64

R9: 8

R10: 75

R11: 80

R12: 66

R13: 83

R14: 98

R15: 75

Photometric Parameters

Luminous Flux: 1776.07 lm

Efficacy: 89.61 lm/W

Radiant Power: 5.430 W

 Radiant Efficiency (η): 0.274

 Photosynthetic Photon Flux (Φ_p): 24.807 $\mu\text{mol/s}$

 Photosynthetic Photon Efficacy (K_p): 1.252 $\mu\text{mol/J}$

 Photosynthetic Radiant Flux (Φ_e): 5.302 W

 Photosynthetic Radiant Efficiency (η_e): 0.268

 Photon Flux (400~500nm): 4.469 $\mu\text{mol/s}$

 Photon Flux (500~600nm): 11.347 $\mu\text{mol/s}$

 Photon Flux (600~700nm): 8.990 $\mu\text{mol/s}$

 Photon Flux (PFfr 700~800nm): 0.775 $\mu\text{mol/s}$

 Photon Flux (PFuv 280~400nm): 0.002 $\mu\text{mol/s}$

 Photon Flux (PF_PBAR): 25.584 $\mu\text{mol/s}$

Radiant Flux (400~500nm): 1.163 W

Radiant Flux (500~600nm): 2.445 W

Radiant Flux (600~700nm): 1.694 W

Radiant Flux (700~800nm): 0.127 W

Radiant Flux (280~400nm): 0.001 W

R/B: 1.5 R/FR: 13.3

 YPF (320~780nm): 21.900 $\mu\text{mol/s}$

 YPF (400~500nm): 3.240 $\mu\text{mol/s}$

 YPF (500~600nm): 9.968 $\mu\text{mol/s}$

 YPF (600~700nm): 8.529 $\mu\text{mol/s}$

 YPF (700~780nm): 0.161 $\mu\text{mol/s}$

 YPF (320~400nm): 0.001 $\mu\text{mol/s}$

Radiant Flux (Chl-A): 0.394 W

Radiant Flux (Chl-B): 0.733 W

Electric Parameters

Voltage: 219.800 V

Current: 0.1020 A

Power: 19.820 W

Power Factor: 0.8840

Frequency: 49.96 Hz

 Geometry: 4n, m
 Warmup Time: 24 Minutes
 Spectroradiometer: LMS-9500C

 Self-absorption Factor: 1.000
 Integration Time: 170 ms
 Digital Power Meter: LS2008R/LS2012-NEW

 Photometric Method: sphere-photometer (spec_rev)
 Peak of Signal: 51860
 Power Source: LSP Series

 Test Lab: LISUN GROUP
 Operator: Jacky

 Testing Environment: Ts:27°C, Ta:25°C,65%
 Approver:

ANSI/IES TM-30-24 Color Rendition Report

Report No: 1763







Test Time: 2025-08-29 12:34:25

Category: LED
 Spec: 20W
 Manufacturer: PHILIPS

Type: Downlight
 Number: 1763
 Submitter: Jacky

CCT: 3959 K
 Duv: 0.000090

P3 V- F-

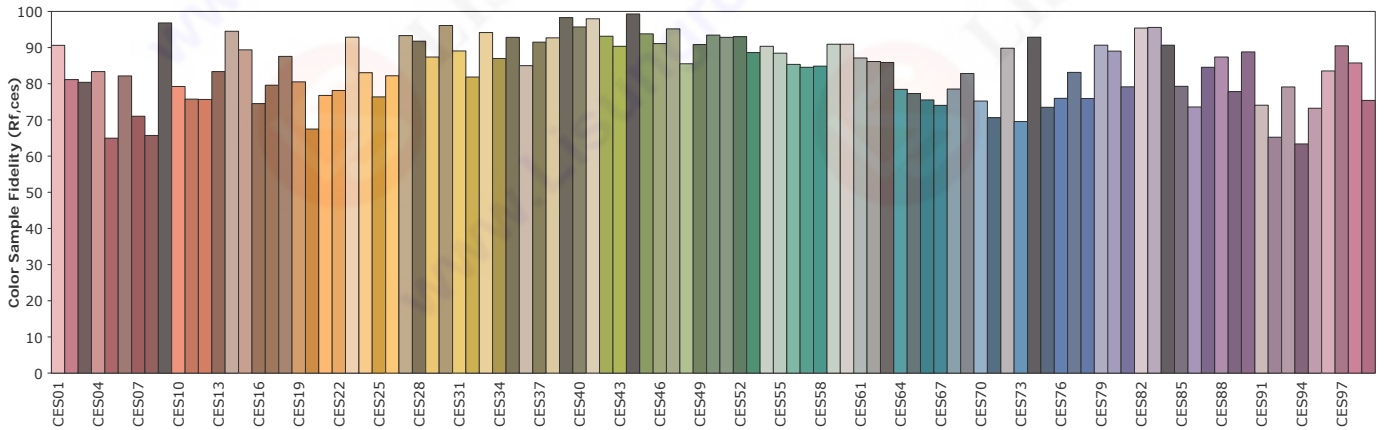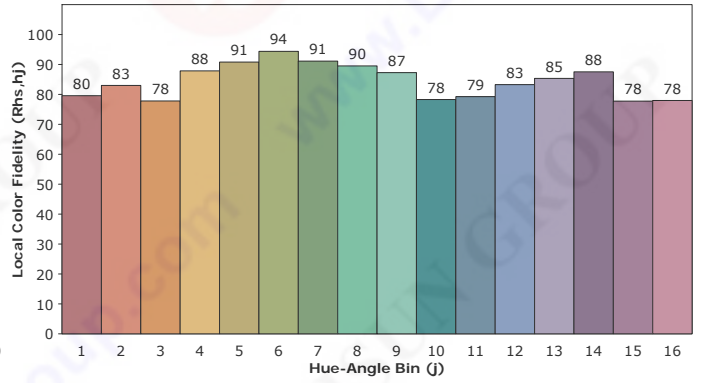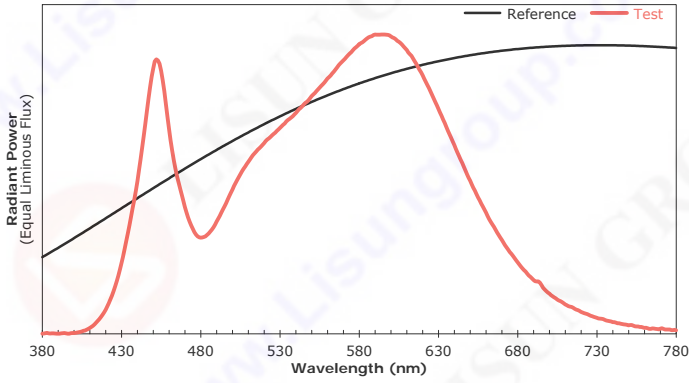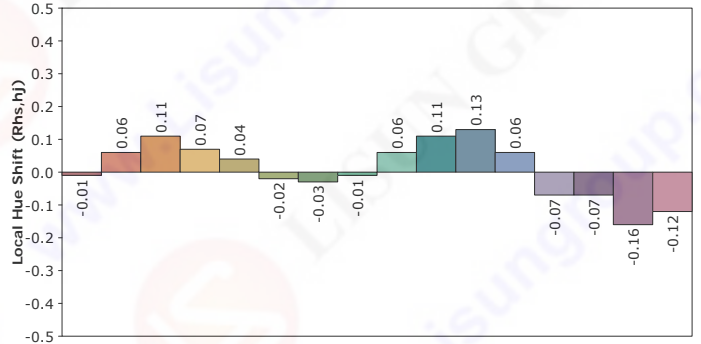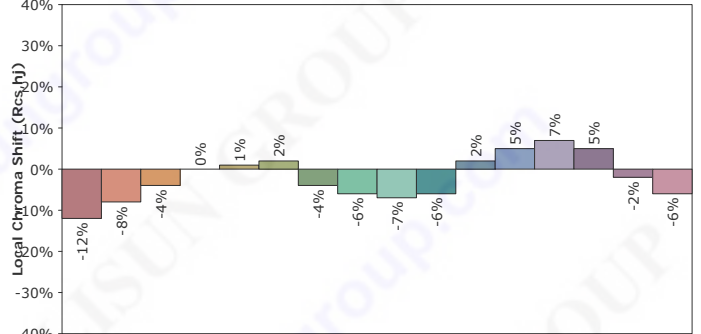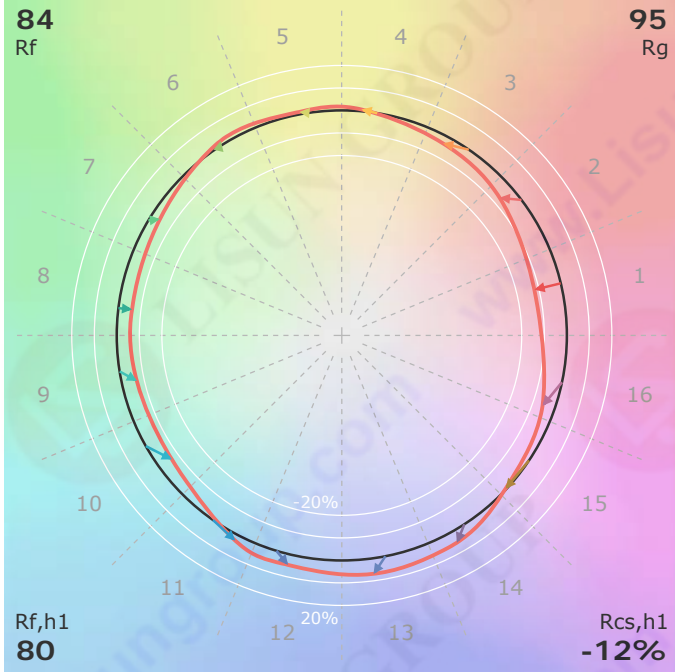

This report was generated according ANSI/IES TM-30-24.

Test Lab: LISUN GROUP
 Operator: Jacky

Testing Environment: Ts:27°C, Ta:25°C,65%
 Approver:

Warmup Curve

Report No: 1763

Test Time: 2025-08-29 12:34:25


Category: LED

Type: Downlight

Spec: 20W

Number: 1763

Manufacturer: PHILIPS

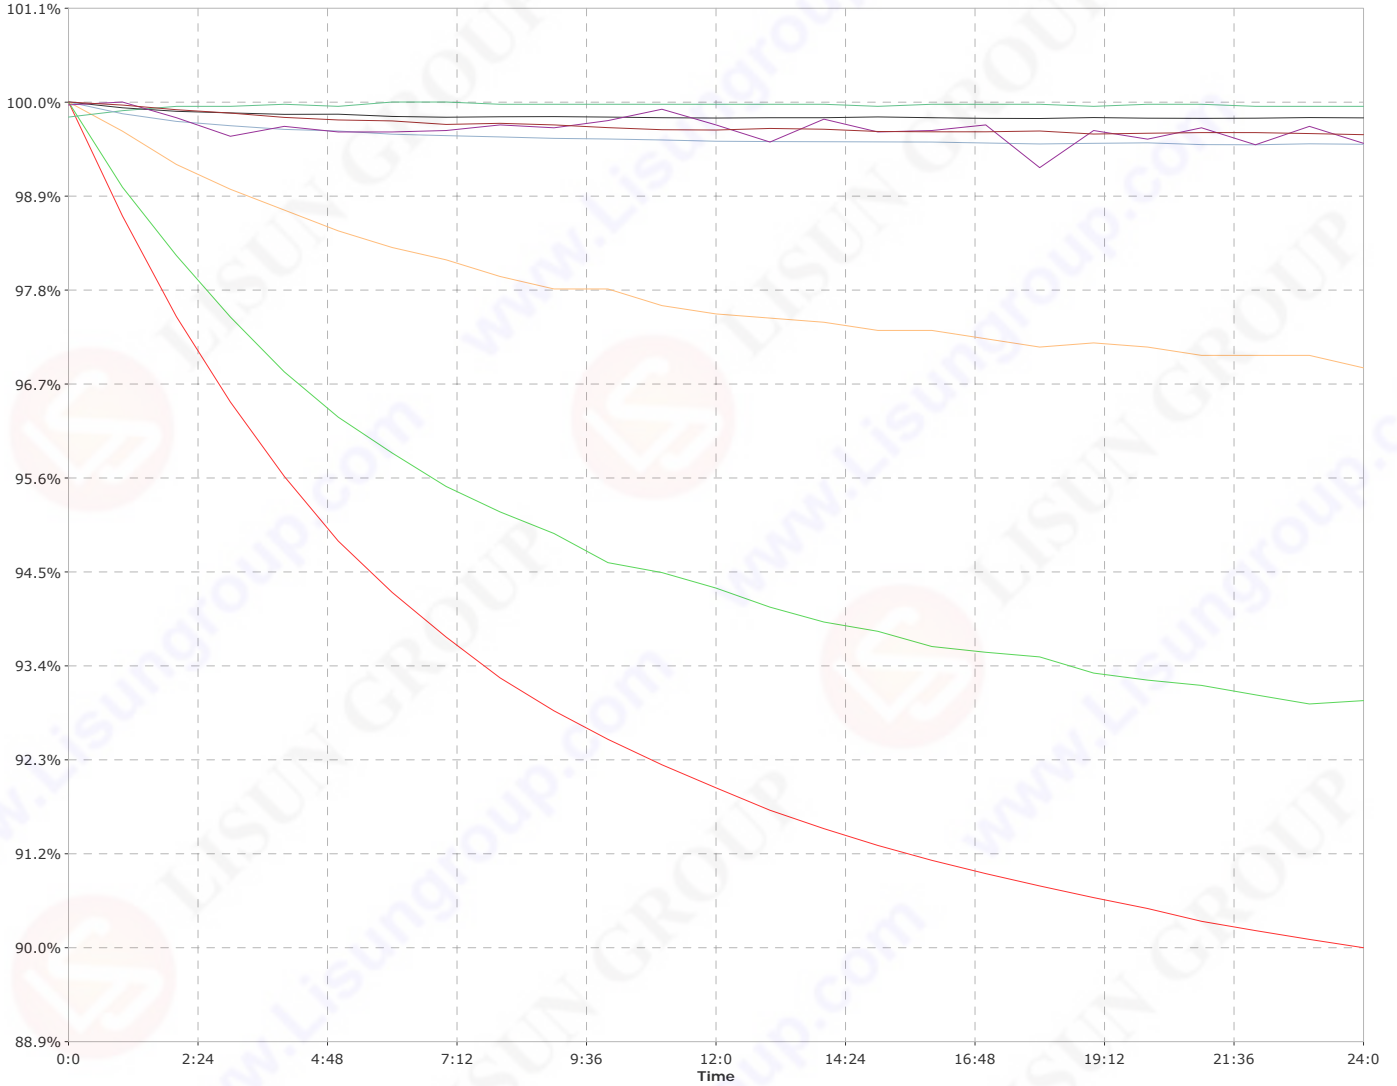Submitter: Jacky


Stable time: 24:0

Uptime: 0:0

Parameters	Maximum	Minimum	Change
Luminous Flux ,lm	1972.46	1776.15	196.31
Power ,W	20.460	19.820	0.640
Efficacy ,lm/W	96.41	89.58	6.83
CCT ,K	3962	3955	7
CIE x	0.3830	0.3823	0.0007
CIE y	0.3800	0.3781	0.0019
Peak Wavelength ,nm	596.8	592.2	4.6
Ra	83.4	83.1	0.3

Spectral Power Distribution Data

Report No: 1763

Test Time: 2025-08-29 12:34:25

Category: LED

Type: Downlight

Spec: 20W

Number: 1763

Manufacturer: PHILIPS

Submitter: Jacky

WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)
350	0.0000	0.00000E+00	397	0.0001	3.09521E-03	444	0.6588	2.04303E+01
351	0.0000	0.00000E+00	398	0.0018	5.46822E-02	445	0.7001	2.17100E+01
352	0.0000	0.00000E+00	399	0.0025	7.78821E-02	446	0.7431	2.30416E+01
353	0.0000	0.00000E+00	400	0.0025	7.60544E-02	447	0.7847	2.43320E+01
354	0.0000	0.00000E+00	401	0.0031	9.76302E-02	448	0.8240	2.55512E+01
355	0.0000	0.00000E+00	402	0.0041	1.28257E-01	449	0.8593	2.66448E+01
356	0.0000	0.00000E+00	403	0.0052	1.59905E-01	450	0.8868	2.74998E+01
357	0.0000	0.00000E+00	404	0.0063	1.95182E-01	451	0.9100	2.82172E+01
358	0.0000	0.00000E+00	405	0.0080	2.47291E-01	452	0.9166	2.84228E+01
359	0.0000	0.00000E+00	406	0.0098	3.03430E-01	453	0.9128	2.83064E+01
360	0.0000	0.00000E+00	407	0.0111	3.44252E-01	454	0.9025	2.79859E+01
361	0.0000	0.00000E+00	408	0.0137	4.24502E-01	455	0.8782	2.72316E+01
362	0.0000	0.00000E+00	409	0.0162	5.03048E-01	456	0.8466	2.62538E+01
363	0.0000	0.00000E+00	410	0.0197	6.10644E-01	457	0.8102	2.51233E+01
364	0.0000	0.00000E+00	411	0.0225	6.98270E-01	458	0.7667	2.37758E+01
365	0.0000	0.00000E+00	412	0.0265	8.20463E-01	459	0.7234	2.24320E+01
366	0.0000	0.00000E+00	413	0.0314	9.73968E-01	460	0.6823	2.11573E+01
367	0.0000	0.00000E+00	414	0.0372	1.15271E+00	461	0.6462	2.00391E+01
368	0.0000	0.00000E+00	415	0.0429	1.33046E+00	462	0.6122	1.89840E+01
369	0.0000	0.00000E+00	416	0.0490	1.52031E+00	463	0.5807	1.80071E+01
370	0.0000	0.00000E+00	417	0.0557	1.72827E+00	464	0.5523	1.71260E+01
371	0.0000	0.00000E+00	418	0.0631	1.95721E+00	465	0.5267	1.63339E+01
372	0.0000	0.00000E+00	419	0.0717	2.22190E+00	466	0.5058	1.56852E+01
373	0.0000	0.00000E+00	420	0.0806	2.49852E+00	467	0.4847	1.50304E+01
374	0.0000	0.00000E+00	421	0.0905	2.80562E+00	468	0.4643	1.43971E+01
375	0.0000	0.00000E+00	422	0.1017	3.15488E+00	469	0.4438	1.37631E+01
376	0.0000	0.00000E+00	423	0.1146	3.55277E+00	470	0.4245	1.31645E+01
377	0.0000	0.00000E+00	424	0.1278	3.96215E+00	471	0.4064	1.26018E+01
378	0.0000	0.00000E+00	425	0.1427	4.42593E+00	472	0.3891	1.20656E+01
379	0.0000	0.00000E+00	426	0.1585	4.91469E+00	473	0.3747	1.16180E+01
380	0.0000	6.76591E-04	427	0.1757	5.44688E+00	474	0.3617	1.12150E+01
381	0.0009	2.89518E-02	428	0.1945	6.03254E+00	475	0.3505	1.08685E+01
382	0.0018	5.43257E-02	429	0.2150	6.66695E+00	476	0.3391	1.05137E+01
383	0.0030	9.23187E-02	430	0.2351	7.29114E+00	477	0.3311	1.02667E+01
384	0.0014	4.45708E-02	431	0.2577	7.98972E+00	478	0.3253	1.00866E+01
385	0.0009	2.82009E-02	432	0.2830	8.77427E+00	479	0.3220	9.98515E+00
386	0.0011	3.40045E-02	433	0.3094	9.59560E+00	480	0.3212	9.96132E+00
387	0.0014	4.38643E-02	434	0.3352	1.03946E+01	481	0.3217	9.97662E+00
388	0.0007	2.25145E-02	435	0.3617	1.12158E+01	482	0.3230	1.00171E+01
389	0.0005	1.62313E-02	436	0.3904	1.21072E+01	483	0.3256	1.00981E+01
390	0.0003	1.03945E-02	437	0.4198	1.30174E+01	484	0.3303	1.02438E+01
391	0.0005	1.47746E-02	438	0.4470	1.38596E+01	485	0.3352	1.03927E+01
392	0.0015	4.66752E-02	439	0.4767	1.47808E+01	486	0.3413	1.05827E+01
393	0.0019	5.79902E-02	440	0.5095	1.57994E+01	487	0.3481	1.07932E+01
394	0.0025	7.79571E-02	441	0.5434	1.68500E+01	488	0.3554	1.10211E+01
395	0.0014	4.47484E-02	442	0.5806	1.80035E+01	489	0.3647	1.13089E+01
396	0.0002	5.37386E-03	443	0.6197	1.92160E+01	490	0.3751	1.16311E+01

 Test Lab: LISUN GROUP
 Operator: Jacky

 Testing Environment: Ts:27°C, Ta:25°C,65%
 Approver:

Spectral Power Distribution Data

Report No: 1763

Test Time: 2025-08-29 12:34:25

Category: LED

Type: Downlight

Spec: 20W

Number: 1763

Manufacturer: PHILIPS

Submitter: Jacky

WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)
491	0.3835	1.18929E+01	538	0.7266	2.25325E+01	585	0.9867	3.05972E+01
492	0.3934	1.21982E+01	539	0.7321	2.27022E+01	586	0.9907	3.07194E+01
493	0.4044	1.25386E+01	540	0.7377	2.28759E+01	587	0.9927	3.07828E+01
494	0.4153	1.28766E+01	541	0.7434	2.30509E+01	588	0.9944	3.08369E+01
495	0.4254	1.31911E+01	542	0.7502	2.32627E+01	589	0.9982	3.09525E+01
496	0.4362	1.35246E+01	543	0.7544	2.33934E+01	590	0.9999	3.10046E+01
497	0.4486	1.39092E+01	544	0.7594	2.35476E+01	591	0.9991	3.09797E+01
498	0.4604	1.42752E+01	545	0.7662	2.37600E+01	592	0.9991	3.09803E+01
499	0.4712	1.46125E+01	546	0.7712	2.39152E+01	593	0.9994	3.09921E+01
500	0.4820	1.49472E+01	547	0.7750	2.40327E+01	594	0.9996	3.09954E+01
501	0.4931	1.52908E+01	548	0.7806	2.42059E+01	595	1.0000	3.10092E+01
502	0.5034	1.56086E+01	549	0.7874	2.44152E+01	596	0.9995	3.09942E+01
503	0.5136	1.59256E+01	550	0.7936	2.46084E+01	597	0.9990	3.09780E+01
504	0.5234	1.62288E+01	551	0.7992	2.47831E+01	598	0.9988	3.09717E+01
505	0.5329	1.65242E+01	552	0.8041	2.49339E+01	599	0.9968	3.09110E+01
506	0.5423	1.68159E+01	553	0.8107	2.51379E+01	600	0.9935	3.08074E+01
507	0.5508	1.70807E+01	554	0.8164	2.53155E+01	601	0.9901	3.07028E+01
508	0.5585	1.73189E+01	555	0.8223	2.54980E+01	602	0.9882	3.06421E+01
509	0.5671	1.75858E+01	556	0.8282	2.56822E+01	603	0.9841	3.05151E+01
510	0.5743	1.78101E+01	557	0.8336	2.58493E+01	604	0.9790	3.03586E+01
511	0.5813	1.80263E+01	558	0.8395	2.60309E+01	605	0.9756	3.02519E+01
512	0.5896	1.82819E+01	559	0.8463	2.62432E+01	606	0.9713	3.01180E+01
513	0.5968	1.85067E+01	560	0.8528	2.64450E+01	607	0.9662	2.99611E+01
514	0.6031	1.87006E+01	561	0.8573	2.65830E+01	608	0.9598	2.97639E+01
515	0.6090	1.88845E+01	562	0.8631	2.67632E+01	609	0.9538	2.95779E+01
516	0.6154	1.90815E+01	563	0.8700	2.69768E+01	610	0.9480	2.93970E+01
517	0.6200	1.92254E+01	564	0.8759	2.71617E+01	611	0.9397	2.91399E+01
518	0.6252	1.93861E+01	565	0.8828	2.73758E+01	612	0.9342	2.89680E+01
519	0.6315	1.95834E+01	566	0.8898	2.75905E+01	613	0.9285	2.87915E+01
520	0.6374	1.97661E+01	567	0.8972	2.78203E+01	614	0.9197	2.85193E+01
521	0.6434	1.99516E+01	568	0.9030	2.80023E+01	615	0.9106	2.82373E+01
522	0.6489	2.01230E+01	569	0.9082	2.81621E+01	616	0.9021	2.79721E+01
523	0.6525	2.02337E+01	570	0.9130	2.83118E+01	617	0.8918	2.76552E+01
524	0.6577	2.03934E+01	571	0.9185	2.84826E+01	618	0.8822	2.73554E+01
525	0.6628	2.05526E+01	572	0.9247	2.86757E+01	619	0.8736	2.70897E+01
526	0.6675	2.06971E+01	573	0.9310	2.88695E+01	620	0.8632	2.67672E+01
527	0.6722	2.08434E+01	574	0.9361	2.90264E+01	621	0.8525	2.64365E+01
528	0.6779	2.10206E+01	575	0.9410	2.91802E+01	622	0.8419	2.61063E+01
529	0.6827	2.11711E+01	576	0.9471	2.93695E+01	623	0.8314	2.57798E+01
530	0.6880	2.13337E+01	577	0.9534	2.95640E+01	624	0.8209	2.54558E+01
531	0.6929	2.14876E+01	578	0.9576	2.96948E+01	625	0.8096	2.51053E+01
532	0.6981	2.16471E+01	579	0.9623	2.98397E+01	626	0.7974	2.47266E+01
533	0.7026	2.17863E+01	580	0.9673	2.99943E+01	627	0.7861	2.43760E+01
534	0.7094	2.19983E+01	581	0.9707	3.01020E+01	628	0.7741	2.40044E+01
535	0.7141	2.21446E+01	582	0.9737	3.01938E+01	629	0.7626	2.36470E+01
536	0.7179	2.22629E+01	583	0.9780	3.03268E+01	630	0.7505	2.32725E+01
537	0.7222	2.23944E+01	584	0.9826	3.04700E+01	631	0.7393	2.29253E+01

 Test Lab: LISUN GROUP
 Operator: Jacky

 Testing Environment: Ts:27°C, Ta:25°C,65%
 Approver:

Spectral Power Distribution Data

Report No: 1763

Test Time: 2025-08-29 12:34:25

Category: LED

Type: Downlight

Spec: 20W

Number: 1763

Manufacturer: PHILIPS

Submitter: Jacky

WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)
632	0.7281	2.25766E+01	679	0.2453	7.60802E+00	726	0.0601	1.86397E+00
633	0.7155	2.21858E+01	680	0.2384	7.39168E+00	727	0.0586	1.81817E+00
634	0.7038	2.18256E+01	681	0.2317	7.18596E+00	728	0.0567	1.75738E+00
635	0.6907	2.14184E+01	682	0.2247	6.96816E+00	729	0.0549	1.70241E+00
636	0.6777	2.10163E+01	683	0.2184	6.77087E+00	730	0.0530	1.64316E+00
637	0.6660	2.06515E+01	684	0.2128	6.59890E+00	731	0.0512	1.58787E+00
638	0.6545	2.02948E+01	685	0.2080	6.44859E+00	732	0.0506	1.56884E+00
639	0.6420	1.99071E+01	686	0.2009	6.23066E+00	733	0.0497	1.54227E+00
640	0.6300	1.95354E+01	687	0.1946	6.03527E+00	734	0.0487	1.51036E+00
641	0.6179	1.91594E+01	688	0.1900	5.89278E+00	735	0.0462	1.43361E+00
642	0.6055	1.87753E+01	689	0.1846	5.72279E+00	736	0.0442	1.37028E+00
643	0.5937	1.84092E+01	690	0.1796	5.57014E+00	737	0.0430	1.33187E+00
644	0.5817	1.80378E+01	691	0.1756	5.44436E+00	738	0.0421	1.30687E+00
645	0.5706	1.76940E+01	692	0.1746	5.41394E+00	739	0.0411	1.27504E+00
646	0.5579	1.73009E+01	693	0.1749	5.42287E+00	740	0.0388	1.20441E+00
647	0.5456	1.69179E+01	694	0.1707	5.29335E+00	741	0.0387	1.19954E+00
648	0.5331	1.65323E+01	695	0.1626	5.04178E+00	742	0.0374	1.16018E+00
649	0.5213	1.61644E+01	696	0.1538	4.77055E+00	743	0.0352	1.09092E+00
650	0.5111	1.58503E+01	697	0.1477	4.57980E+00	744	0.0351	1.08880E+00
651	0.4998	1.54980E+01	698	0.1426	4.42179E+00	745	0.0336	1.04049E+00
652	0.4882	1.51388E+01	699	0.1378	4.27419E+00	746	0.0325	1.00924E+00
653	0.4782	1.48274E+01	700	0.1341	4.15797E+00	747	0.0311	9.63808E-01
654	0.4668	1.44741E+01	701	0.1293	4.00928E+00	748	0.0305	9.47251E-01
655	0.4556	1.41274E+01	702	0.1252	3.88241E+00	749	0.0297	9.20960E-01
656	0.4456	1.38164E+01	703	0.1217	3.77254E+00	750	0.0280	8.69490E-01
657	0.4345	1.34729E+01	704	0.1187	3.68069E+00	751	0.0292	9.04017E-01
658	0.4250	1.31786E+01	705	0.1142	3.54052E+00	752	0.0290	9.00134E-01
659	0.4149	1.28650E+01	706	0.1108	3.43655E+00	753	0.0269	8.35040E-01
660	0.4044	1.25416E+01	707	0.1087	3.36931E+00	754	0.0248	7.69867E-01
661	0.3938	1.22123E+01	708	0.1057	3.27895E+00	755	0.0243	7.52224E-01
662	0.3829	1.18744E+01	709	0.1019	3.16047E+00	756	0.0242	7.51192E-01
663	0.3739	1.15953E+01	710	0.0984	3.05053E+00	757	0.0229	7.09026E-01
664	0.3655	1.13352E+01	711	0.0956	2.96444E+00	758	0.0228	7.08357E-01
665	0.3576	1.10884E+01	712	0.0921	2.85538E+00	759	0.0212	6.55988E-01
666	0.3480	1.07911E+01	713	0.0905	2.80611E+00	760	0.0196	6.07333E-01
667	0.3384	1.04931E+01	714	0.0894	2.77158E+00	761	0.0200	6.18871E-01
668	0.3299	1.02304E+01	715	0.0866	2.68661E+00	762	0.0186	5.77815E-01
669	0.3212	9.96015E+00	716	0.0829	2.57170E+00	763	0.0161	4.97966E-01
670	0.3132	9.71318E+00	717	0.0803	2.49068E+00	764	0.0161	4.99432E-01
671	0.3050	9.45690E+00	718	0.0791	2.45163E+00	765	0.0179	5.56002E-01
672	0.2962	9.18346E+00	719	0.0765	2.37118E+00	766	0.0176	5.47001E-01
673	0.2885	8.94748E+00	720	0.0730	2.26213E+00	767	0.0162	5.02242E-01
674	0.2809	8.71174E+00	721	0.0711	2.20501E+00	768	0.0159	4.92790E-01
675	0.2732	8.47303E+00	722	0.0689	2.13690E+00	769	0.0149	4.61791E-01
676	0.2672	8.28479E+00	723	0.0670	2.07704E+00	770	0.0171	5.28882E-01
677	0.2601	8.06420E+00	724	0.0656	2.03476E+00	771	0.0182	5.65643E-01
678	0.2527	7.83734E+00	725	0.0629	1.95156E+00	772	0.0163	5.06938E-01

 Test Lab: LISUN GROUP
 Operator: Jacky

 Testing Environment: Ts:27°C, Ta:25°C,65%
 Approver:

Spectral Power Distribution Data
Report No: 1763

Test Time: 2025-08-29 12:34:25

Category: LED

Type: Downlight

Spec: 20W

Number: 1763

Manufacturer: PHILIPS

Submitter: Jacky

WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)	WL(nm)	PL	PE(mW/nm)
773	0.0144	4.45740E-01	783	0.0099	3.07021E-01	793	0.0082	2.52773E-01
774	0.0140	4.34096E-01	784	0.0098	3.04318E-01	794	0.0095	2.93180E-01
775	0.0139	4.31158E-01	785	0.0113	3.51472E-01	795	0.0065	2.02201E-01
776	0.0142	4.40897E-01	786	0.0097	3.00556E-01	796	0.0058	1.79620E-01
777	0.0120	3.71005E-01	787	0.0091	2.82170E-01	797	0.0077	2.38553E-01
778	0.0119	3.69652E-01	788	0.0087	2.70489E-01	798	0.0089	2.74628E-01
779	0.0131	4.05368E-01	789	0.0073	2.25650E-01	799	0.0071	2.19337E-01
780	0.0115	3.56695E-01	790	0.0063	1.96826E-01	800	0.0040	1.23854E-01
781	0.0118	3.66061E-01	791	0.0087	2.69815E-01			
782	0.0109	3.39174E-01	792	0.0080	2.49224E-01			